

WD-XXX Series Product Specifications

Sun Well Solar Corporation

220, Wen-Huah 2nd Road, Kwei-Shan, Tao-Yuan, 333 Taiwan

TEL : +886-3-2550250

FAX : +886-3-3187012

WEB: www.sunwellsolar.com



1. Product Specifications

(1) WD-XXX Series Module Specifications

Table1. Physical Specifications

Property		Specification
Active Material of Cell		Amorphous and microcrystal silicon
Junction Type of Cell		a-Si/ μ c-Si double-junction
Material for Encapsulation		White Polyvinylbutyral (WPVB), thickness: 0.45 mm
Front Cover		Float glass, thickness: 3.2 mm
Back Cover		Float glass, thickness: 3.2 mm
Wiring Material		Tin & silver coated copper ribbon, thickness: 0.1 mm
Junction Box	Bypass Diode	Yes
	IP Class	IP67
	Cable Length	Direction : Downward Length : 800 mm(+), 600 mm(-)
Connecting Cable/Plug		Rated voltage : 1000 V D.C. Temperature range : -40 to 85 °C Plug/Socket type : MC4 compatible, \varnothing 4 mm Cable cross section : 2.5 mm ²
Transparency		No
Frame		No
Dimensions	Length	1300 mm +2/-1 mm
	Width	1100 mm +2/-1 mm
	Thickness	6.8 \pm 0.5 mm (without junction box) 27.0 \pm 1.0 mm (with junction box)
Weight		24.0 \pm 1.0 Kg

Table 2. Certifications

Certifications	
Certifications	EN/IEC 61646 & EN/IEC 61730
<p>Remark: The module is tested under 2400 Pa (50 lb/ft²) mechanical load or approximately to a wind speed of 130 km/h (80 mph) with certificated mounting solution. Other mounting solutions for higher mechanical loads tested in-house by SWS are also available and warranted.</p>	


Table3. Electrical Specifications ^{*1,2,4,5}

Property			Specification							
Max. System Voltage			1000 V D.C. (IEC) 600 V D.C. (UL)							
Temperature Coefficients			Isc: +0.07 %/K Voc: -0.33 %/K Pmpp: -0.27%/K							
Maximum Over-current Protection Rating			2.5 A							
Maximum Series Fuse Rating			5 A							
Module Classification	Power Grade	Power Grade Tolerance	Stabilized Performance at STC ^{*3}				Initial Performance at STC ^{*3}			
			Vmpp [V]	Impp [A]	Voc [V]	Isc [A]	Vmpp [V]	Impp [A]	Voc [V]	Isc [A]
			Electrical Tolerance: ± 10% ^{*6}							
WD-135	135 W	+4.99 / -0 Wp	72	1.90	92	2.23	74	2.14	94	2.30
WD-130	130 W		71	1.86	92	2.22	73	2.09	93	2.29
WD-125	125 W		70	1.83	91	2.22	72	2.04	92	2.28
Remarks:										
1. The modules electrical ratings are measured under Standard Test Conditions (STC) and have been delivered on the specific table of electrical characteristics as shown above.										
2. A photovoltaic module may produce more current and/or voltage than reported at STC. Sunny, cool weather and reflection from snow or water can increase current and power output. Therefore, the values of Isc and Voc marked on the modules should be multiplied by a factor of 1.25 when determining component voltage ratings, conductor ampacities, fuse sizes, and size of controls connected to PV output.										
3. STC(Standard Test Condition): irradiation of 1000 W/m ² , spectrum AM 1.5 and a cell temperature of 25 °C.										
4. The exactly measured electrical characteristics are shown on the label of the modules.										
5. All electrical data is average production data and is subject to a measuring equipment tolerance of ± 3%.										
6. Electronic tolerance is ± 10% except power grade tolerance.										

2. Dimensions and Drawing

Refer to the following diagram.

Unit: mm

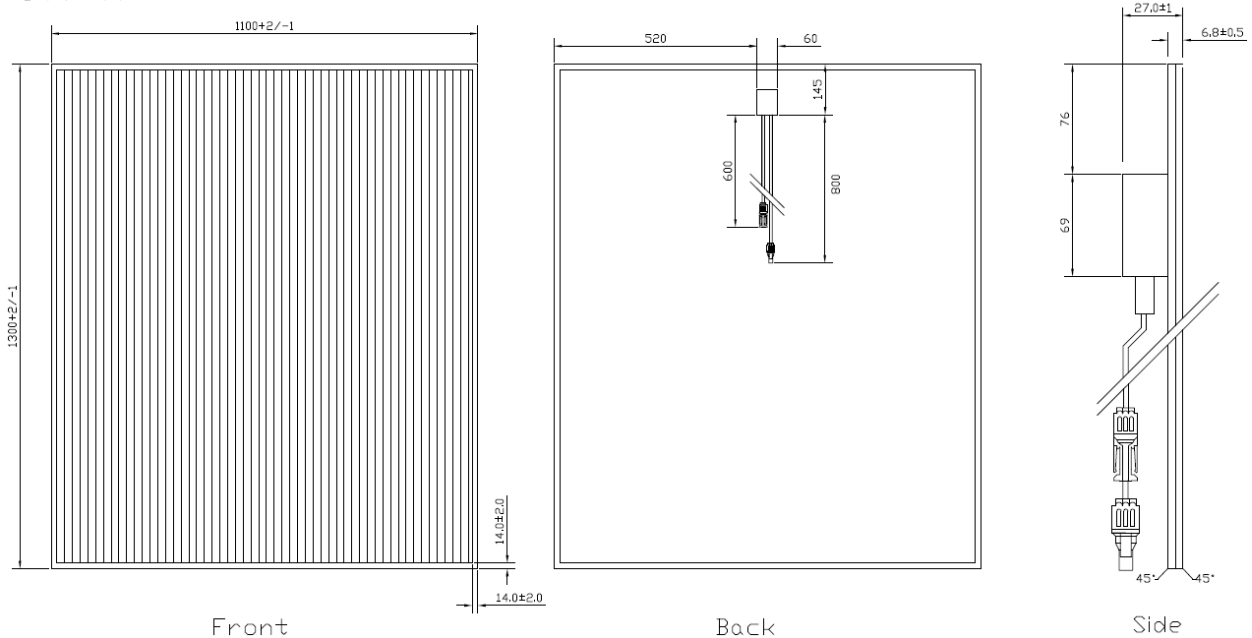

3. Packing Specifications

Table 4-1. Packing specifications for 30 modules

Packing
30 modules vertically posited in a crate with pallet
Box approx. dimension: 1420(L)×1130(W)×1260(H) mm
Net weight : 710 Kg ± 2%
Gross weight : 810 Kg ± 2%

Table 4-2. Packing specifications for 40 modules

Packing
40 modules vertically posited in a crate with pallet
Box approx. dimension: 1180(L)×960(W)×1480(H) mm
Net weight : 947 Kg ± 2%
Gross weight : 1010 Kg ± 2%

4. Operating conditions

- (1) The modules should be operated under sufficient sunlight and subjected to seawater or snowfall (1 m or more) should be avoided. Ambient temperature should be in the range between -20 °C and 50 °C. Module operating temperature should be in the range between -20 °C and 85 °C. The vertical installation (ie. the laser lines on the panel point to ground) of the PV modules is recommended. Shadow on modules should be prevented otherwise shading

shall cause power output decline and even fire hazard. Water accumulating on the junction box or junction box being immersed in water should be avoided.

- (2) **The modules must only be used in configurations where the negative polarity of the PV module is connected to ground. Fail to comply with this requirement will invalidate warranty for the modules.** Details for the grounding should refer to the applicable local codes for electrical system on specific requirements. Contact your sales agent or SWS if any questions about grounding remained.






5. Warranty

Warranty on Product (Workmanship / Material)	Warranty on Power Grade Output
5 years from the date of shipment from SWS.	90% of the power grade output of the module for a 10-year period, 80% of the power grade output of the module for a 25-year period from the date of shipment from SWS.


6. Performance characteristics

(1) I-V performance

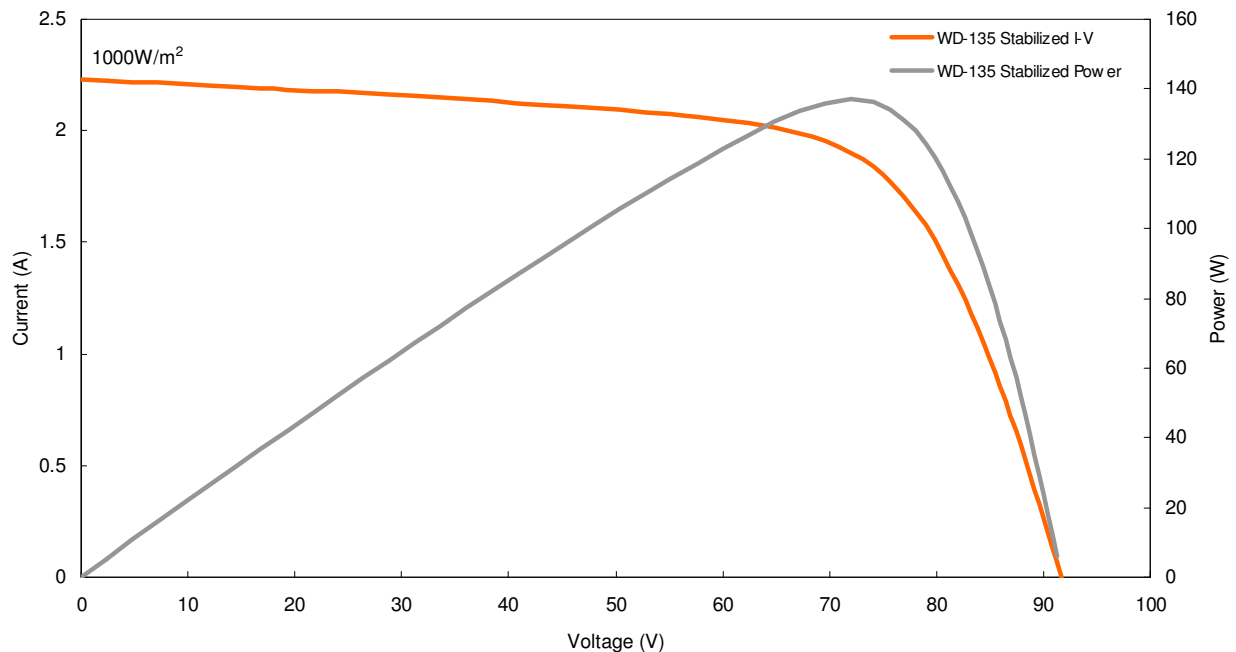

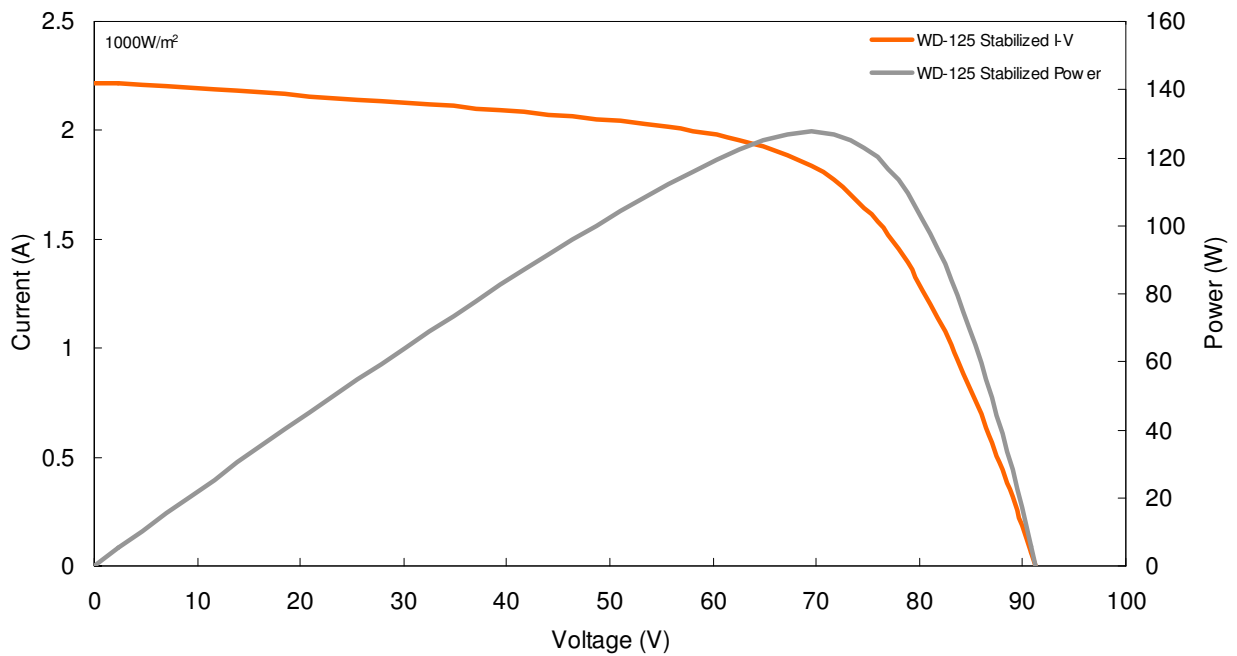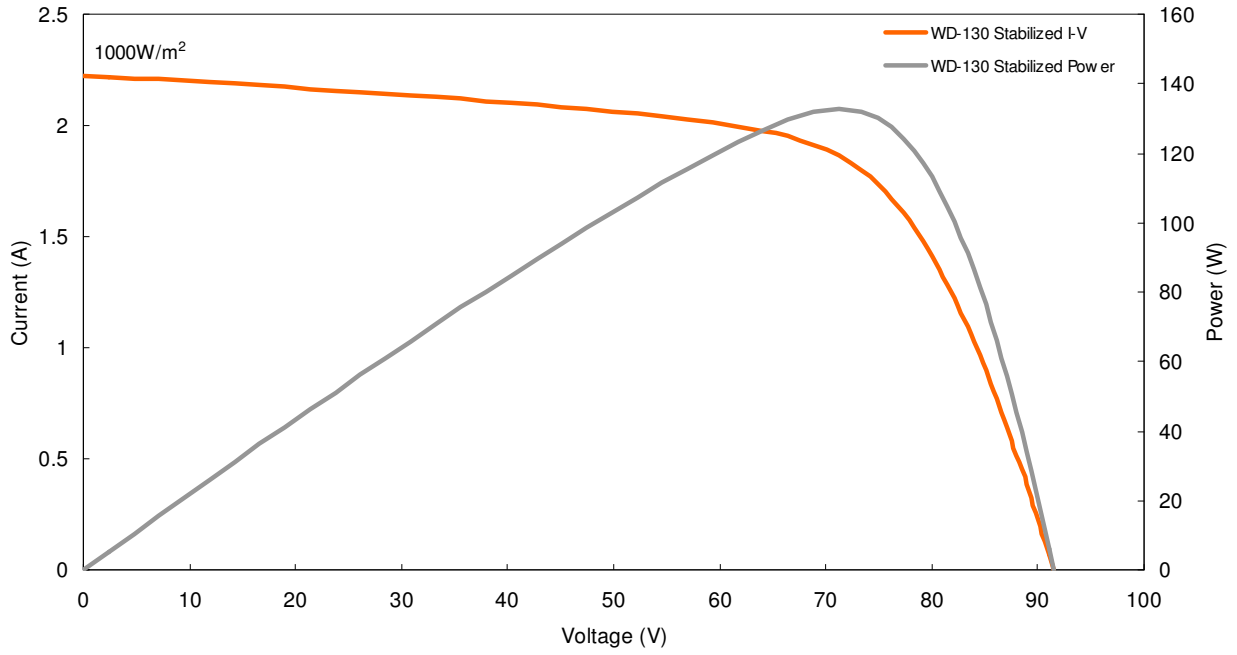


(2) Temperature coefficients

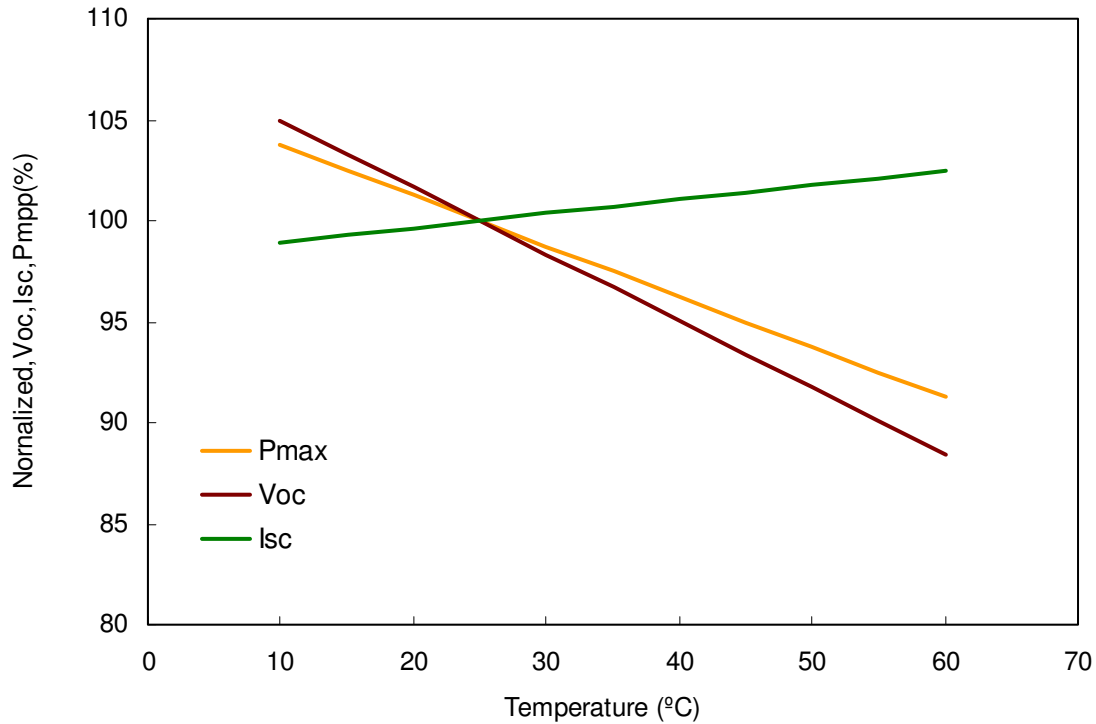

(3) Module performance under different irradiances (At AM 1.5 and 25°C cell temperature)


Note: All electrical data below is subject to a measuring equipment tolerance of ± 3%. Electronic tolerance is ± 10% except that of P_{mp}.

● Model: WD-135 (135 Wp)

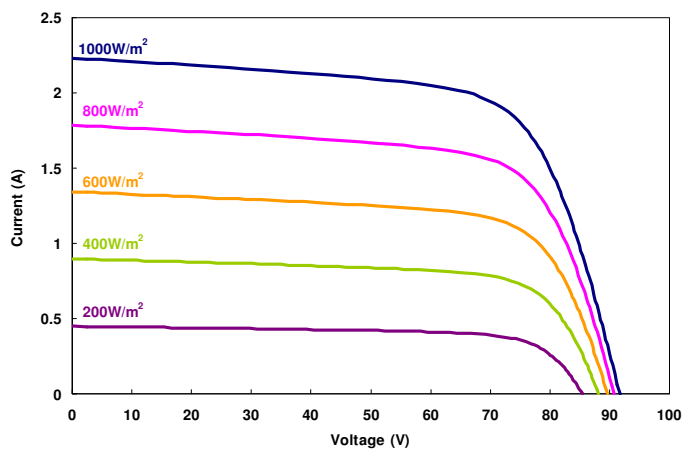


Irradiance [W/m ²]	P _{mpp} [W]	V _{mpp} [V]	I _{mpp} [A]	V _{oc} [V]	I _{sc} [A]
1000	137	72	1.90	92	2.23
800	110	72	1.52	91	1.79
600	83	73	1.14	90	1.34
400	55	73	0.76	88	0.90
200	28	72	0.38	85	0.45

● Model: WD-130 (130 Wp)

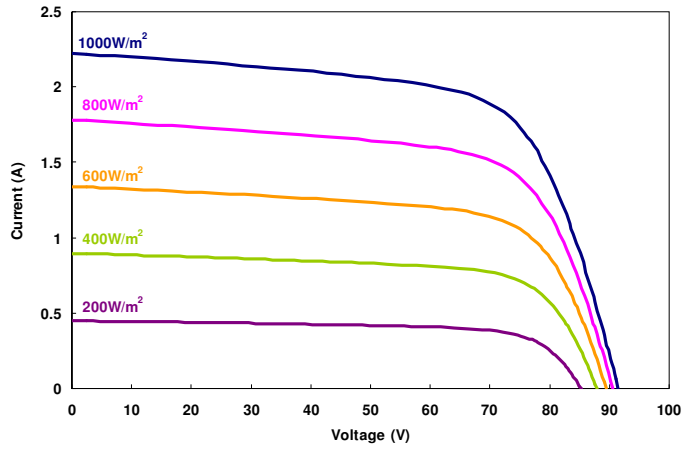

Irradiance [W/m ²]	P _{mpp} [W]	V _{mpp} [V]	I _{mpp} [A]	V _{oc} [V]	I _{sc} [A]
1000	133	71	1.86	92	2.22
800	106	72	1.48	91	1.78
600	78	70	1.14	89	1.34
400	54	72	0.75	88	0.90
200	27	71	0.38	85	0.45

● Model: WD-125 (125 Wp)

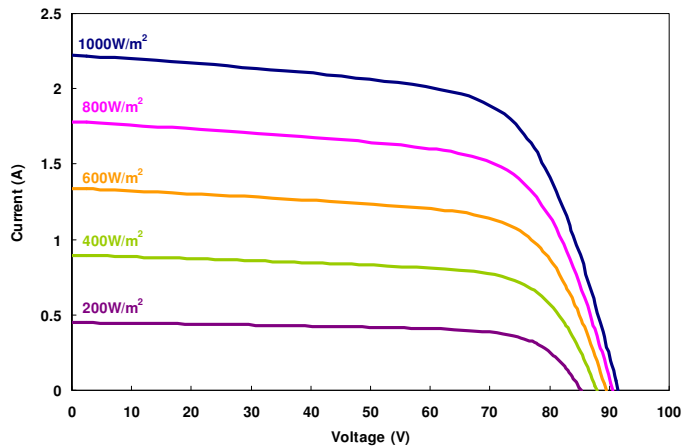

Irradiance [W/m ²]	P _{mpp} [W]	V _{mpp} [V]	I _{mpp} [A]	V _{oc} [V]	I _{sc} [A]
1000	128	70	1.83	91	2.22
800	102	70	1.47	90	1.78
600	77	70	1.10	89	1.34
400	52	70	0.75	87	0.89
200	26	68	0.38	84	0.45